

# INJECTION DEVICE

**Publication number:** JP2002500933 (T)

**Publication date:** 2002-01-15

**Inventor(s):**

**Applicant(s):**

**Classification:**

- **international:** **A61M5/20; A61M5/32; A61M5/28; A61M5/20; A61M5/32;**  
A61M5/28; (IPC1-7): A61M5/20; A61M5/32

- **European:** A61M5/20C; A61M5/32C2H2F; A61M5/32C2H5

**Application number:** JP20000528321T 19980807

**Priority number(s):** DE19982001168U 19980124; WO1998EP05015 19980807

## Also published as:


JP4347520 (B2)  
WO9937343 (A1)  
US6544234 (B1)  
EP1049501 (A1)  
EP1049501 (B1)

more >>

Abstract not available for JP 2002500933 (T)

Abstract of corresponding document: **WO 9937343 (A1)**

An injection device comprising a housing (50, 60) with a spring (94) arranged therein in order to accumulate energy for an injection process. The spring (94) impinges upon a squeezing member (92) in a proximal direction to enable injection fluid (16) to be squeezed out of a container which is displaceably mounted in the housing and which has an injection needle (18) secured to the end thereof. A displacement member (36) is arranged in the housing. Said member can move in a longitudinal direction and push the container in a proximal direction, thereby causing the needle to be inserted. A detent lug (100) is provided on the squeezing member (92). A corresponding detent opening (102) in the displacement member (36) is associated therewith. A control member (70) operating according to the travel path is used to disengage the detent lug (100) from the detent opening (102) when the displacement member (36) has completed a specific travel path in a proximal direction.

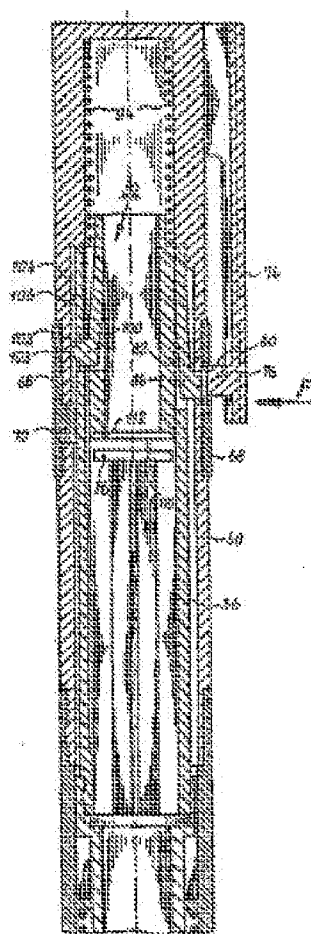

Data supplied from the **espacenet** database — Worldwide